


- 模組編號: P20-D01V
- LED 型號: DIP 546 2R1G1B
- 使用環境 : Outdoor IP65 戶外等級
- 點距: 實像素:20mm 虛擬像素:10mm
- 驅動方式 : Static Constant Current 靜態恆流驅動

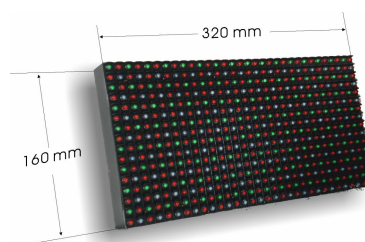

LED Specification	OVAL 5mm Lamp_R	OVAL 5mm Lamp_G	OVAL 5mm Lamp_B
LED 型態編號	DIP 546	DIP 546	DIP 546
亮度@20mA(mcd)	1000	2800	500
波長 (nm)	620~625	520~525	465~470
正向壓降 (V)	2.1~2.2	3.3~3.4	3.3~3.4
晶片尺寸 (mil)	12x12	15x15	15x15
晶片厚度 ((mil)	6.7	3.4	3.4
視角(2θ1/2)	110/40	110/40	110/40

顯示模組參數	規格明細
像素點距 Pixel Pitch	Real:20mm / Virtual:10mm
模組解析 Module Resolution	16x8 Pixel
像素結構 Pixel Configuration	2R/1G/1B
驅動元件 LED Driver	16 Bit
驅動方式 Driving Method	Static Constant Current
模組尺寸 Module Panel Size	320mmx160mm
環境係數 Front Module Weather Proof	IP65
模組重量 Module Panel Weight	1.25Kg
最佳視距 Option Distance	>20M
工作電壓 Working Voltage	DC +5V
最大負載 Max Working Consumption	35Watt
使用壽命 Life Time	>75,000.Hours
工作溫度 Operating Environment Temperature	-20℃~50℃
工作溼度 Operating Humidity	0~95%
單點亮度 Brightness Per Pixel	4,666mcd
模組材質 Material Of Module Frame	PC

2012/01/01

