


- Module NO: P4-M08
- LEDType: SMD 3 in 1_1R1G1B
- Apply Environment : Indoor IP31
- Pixel Pitch : 4 mm
- Driver Method : 1/8 Scan Constant Current



| ITEM | DESCRIPTION |
|--|--------------------------------------|
| Pixel pitch | 4 (mm) |
| Brightness | 2000 nit |
| Cabinet dimensions (W×H×D) | 512×512×150 (mm) |
| Cabinet dimensions (W×H×D) | 20.2×20.2×5.9 (Inch) |
| Panel material | Steel |
| Weight | 8 (kg) |
| Weight | 22 (lbs) |
| Pixel configuration | SMD 3in1 1R1G1B |
| Module dimensions (W×H) | 128×128 (mm) |
| Module dimensions (W×H) | 5.0×5.0(Inch) |
| Pixel matrix per panel | 128×128 pixels |
| Pixel density | 62,500 pixels/sq.m. |
| Refresh rate | ≥960 Hz |
| Gray scale per color | 2048 level |
| Colors | 8.59 Gillion |
| Viewing angle (H/V) | 120/120deg |
| IP rating (Front/Rear) | IP31/IP54 |
| Power consumption (max/avg) | 1800/600 W/sq.m. |
| Input voltage (AC) | 110V ~ 240V |
| Operating temperature | - 20℃ ~+ 50℃ |
| Operating humidity | 10% ~ 90% |
| Source compatibility (with video processor) | AV, S-Video, VGA, DVI, HDMI, SDI, DP |
| Note: The above parameter is just for reference. Changes can be made according to customers' requirements. | |

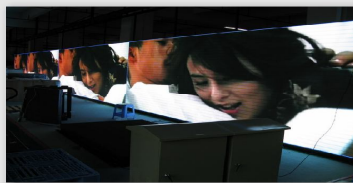

Synch LED Display Engineering CO., LTD

No.1-2, Guangfu Rd., Xitun Dist., Taichung City 407, Taiwan (R.O.C.) TEL:+886-4-24519696