


- Module NO: P6.67-M08
- LEDType: SMD 3 in 1\_1R1G1B
- Apply Environment : Indoor IP31
- Pixel Pitch : 6.67 mm
- Driver Method : 1/8 Scan Constant Current

ITEM	DESCRIPTION
Pixel pitch	6.67 (mm)
Brightness	8,500 nit
Cabinet dimensions (W×H×D)	960×960×150 (mm)
Cabinet dimensions (W×H×D)	37.8×37.8×5.9 (Inch)
Panel material	Steel
Weight	36 (kg)
Weight	79.2 (lbs)
Pixel configuration	SMD 3in1 1R1G1B
Module dimensions (W×H)	320×320 (mm)
Module dimensions (W×H)	12.6×12.6(Inch)
Pixel matrix per panel	144×144 pixels
Pixel density	22477 pixels/sq.m.
Refresh rate	≥1680 Hz
Gray scale per color	4096 level
Colors	68.7 Gillion
Viewing angle (H/V)	120/120deg
IP rating (Front/Rear)	IP31/IP54
Power consumption (max/avg)	1800/600 W/sq.m.
Input voltage (AC)	110V ~ 240V
Operating temperature	- 20℃ ~+ 50℃
Operating humidity	10% ~ 90%
Source compatibility (with video processor)	AV, S-Video, VGA, DVI, HDMI, SDI, DP
Note: The above parameter is just for reference. Changes can be made according to customers' requirements.	

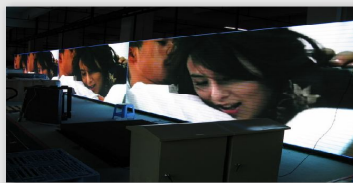

Indoor\_P4

## Synch LED Display Engineering CO., LTD

No.1-2, Guangfu Rd., Xitun Dist., Taichung City 407, Taiwan (R.O.C.) TEL:+886-4-24519696